PROJECT REPORT

N02, EP Amsteg – Göschenen, Main works

Data and facts

Company	PORR SUISSE AG in consortium
Type	Structural engineering
Runtime	02.2022 - 11.2023
Principal	Federal Roads Office FEDRO

Project report online

www.porr.ch

Renovation of the A2.

Galleries

- Reinforcement and repair of supporting structures in portal areas at 4 galleries
- Repair of anchorages at 3 galleries
- Widening of 24 supports at the Wilerplanggen gallery

Tunnels

- New construction of a total of 5 cross galleries in the Platti, Teiftal and Naxberg tunnels

- Conversion of a transformer room into a new cross gallery in the Langlaui tunnel
- Adjustment of 2 cross galleries in the Naxberg tunnel
- Repair work in 7 tunnels
- Removal and replacement of ceramic tiles in 5 tunnels
- Removal and replacement of surface protection in 7 tunnels

Retaining walls

- Reinforcement of the retaining wall at the Höll FBNO lean-to viaduct with prestressed anchor
- Various maintenance measures with prestressed anchors on 8 retaining walls

To the construction site completion report

Impressions

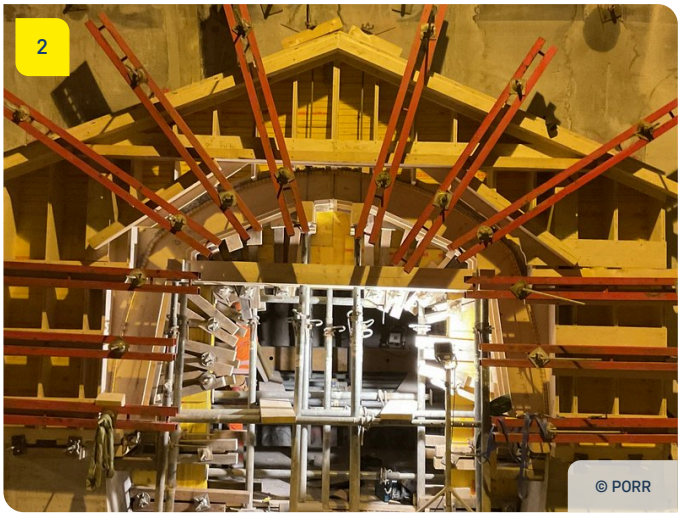

Image notes

1 **Cross connection before shuttering.**

The reinforcement for a new transverse gallery in the Teiftal tunnel, constructed after the rock excavation and the application of the sealing.

© PORR

2 **Ready for the concrete.**

After the reinforcement has been laid, the new transverse connection is formed.

© PORR

Do you have questions about the project or would you like to learn more? Feel free to contact us for further information.

PORR SUISSE AG

Seedorferstrasse 56

6460 Altdorf

T +41 41 875 01 01

E-Mail: info@porr.ch